


Z0-10-5050



Z0-10-5050-RGB




Z0-COB

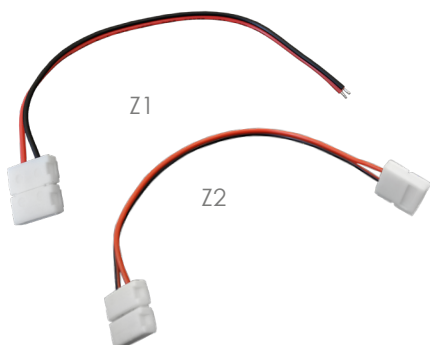

Z1

Z2



Z1-RGB



Z2-RGB



Z1-COB




WDC-Z1



Z2-COB




operating voltage:
12 to 24 V



connectors with cables
with a length of
approx. 14 cm



two types of strip sockets:
SMD3528 = 8 mm
SMD5050 = 10 mm



snap connection



code

B46-WDC-Z1
B46-Z0-08-3528
B46-Z0-10-5050
B46-Z0-10-5050-RGB
B46-Z1-08-3528
B46-Z1-10-5050
B46-Z1-10-5050-RGB
B46-Z2-08-3528
B46-Z2-10-5050
B46-Z2-10-5050-RGB
B46-Z0-08-COB
B46-Z1-08-COB
B46-Z2-08-COB



EAN

5900280933683
5900280933553
5900280933560
5900280933577
5900280933584
5900280933690
5900280933607
5900280933614
5900280933621
5900280933638
5900280968340
5900280968357
5900280968364



connector type

female connector with cable
self-clamping
self-clamping
self-clamping
1-sided with cable
1-sided with cable
1-sided with cable
2-sided with cable
2-sided with cable
2-sided with cable
self-clamping
1-sided with 15 cm cable
2-sided with 15 cm cable



compatible LED strip type

SMD3528/5050 - 8/10 mm - mono
SMD3528 - 8 mm - mono
SMD5050 - 10 mm - mono
SMD5050 - 10 mm - RGB
SMD3528 - 8 mm - mono
SMD5050 - 10 mm - mono
SMD5050 - 10 mm - RGB
SMD3528 - 8 mm - mono
SMD5050 - 10 mm - mono
SMD5050 - 10 mm - RGB
COB
COB
COB